

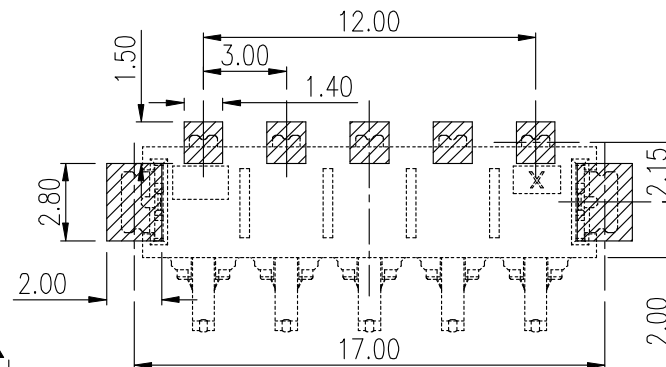
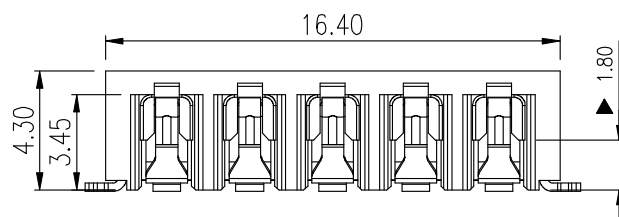
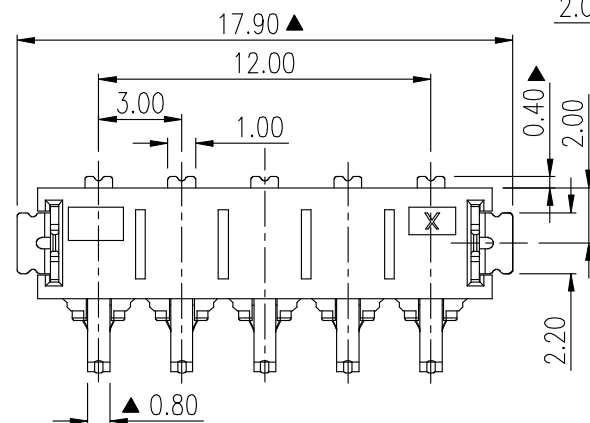


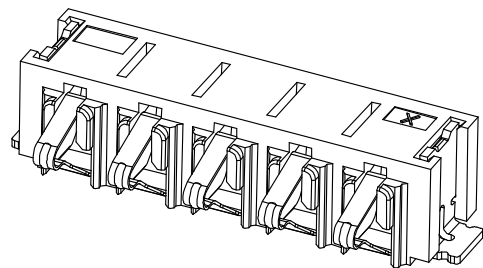

RECOMMENDED P.C.BOARD LAYOUT (TOP VIEW)
TOLERANCES UNLESS OTHERWISE SPEC.±0.05
PAD AREA

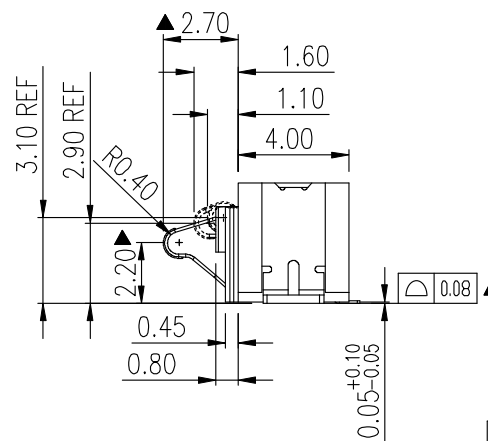

1.MATERIAL:

- 1.1.Housing:HI-TEMP Plastic,UL94V-0,black;
- 1.2.Terminal:Coppo alloy
- 1.3 Latch:Coppo alloy

2.FINISH:

- 2.1 Terminal: 3 u " Au plating on contact area, 2 u " Au plating on other area, underplated nickel over all.
- 2.2 Latch: 2 u " Au plating on all area, underplated nickel over all.

3.Electrical Performance:


- 3.1 Current rating (single pin):2A MAX.
- 3.2 Contact Resistance:50mΩ Max;
- 3.3 Dielectric Withstanding Voltage: 500V AC rms for 1 minut;
- 3.4 Insulation Resistance:1000 MΩ Min;

4.Mechanical Performance:

- 4.1 Durability:3000 cycles;

5.PACKING:Tape&Reel;

6.圖示尺寸有標註▲記號者為重點尺寸

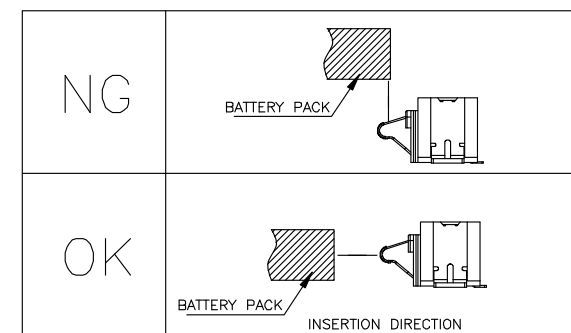

Rev.	ECN Number	Description	Drawn	Date
A		PRELIMINARY	PING	2018/6/19

朗顿电子

GENERAL TOLERANCE

XX. ±0.25	XXX. ° ±4°
X. ±0.20	XX. ° ±3°
.X ±0.15	X. ° ±2°
.XX ±0.10	.X ° ±1°

SCALE

1:1

DRAWN BY

DATE

DWG NO.

TITLE

REV

UNIT

mm

CHECKED BY

DATE

PART NO.

4.3H 5PIN 3.0PITCH
电池连接器 成品检验图

SHEET

SIZE



APPROVED BY

DATE

DS-162

BC-2-504

A

1/1