


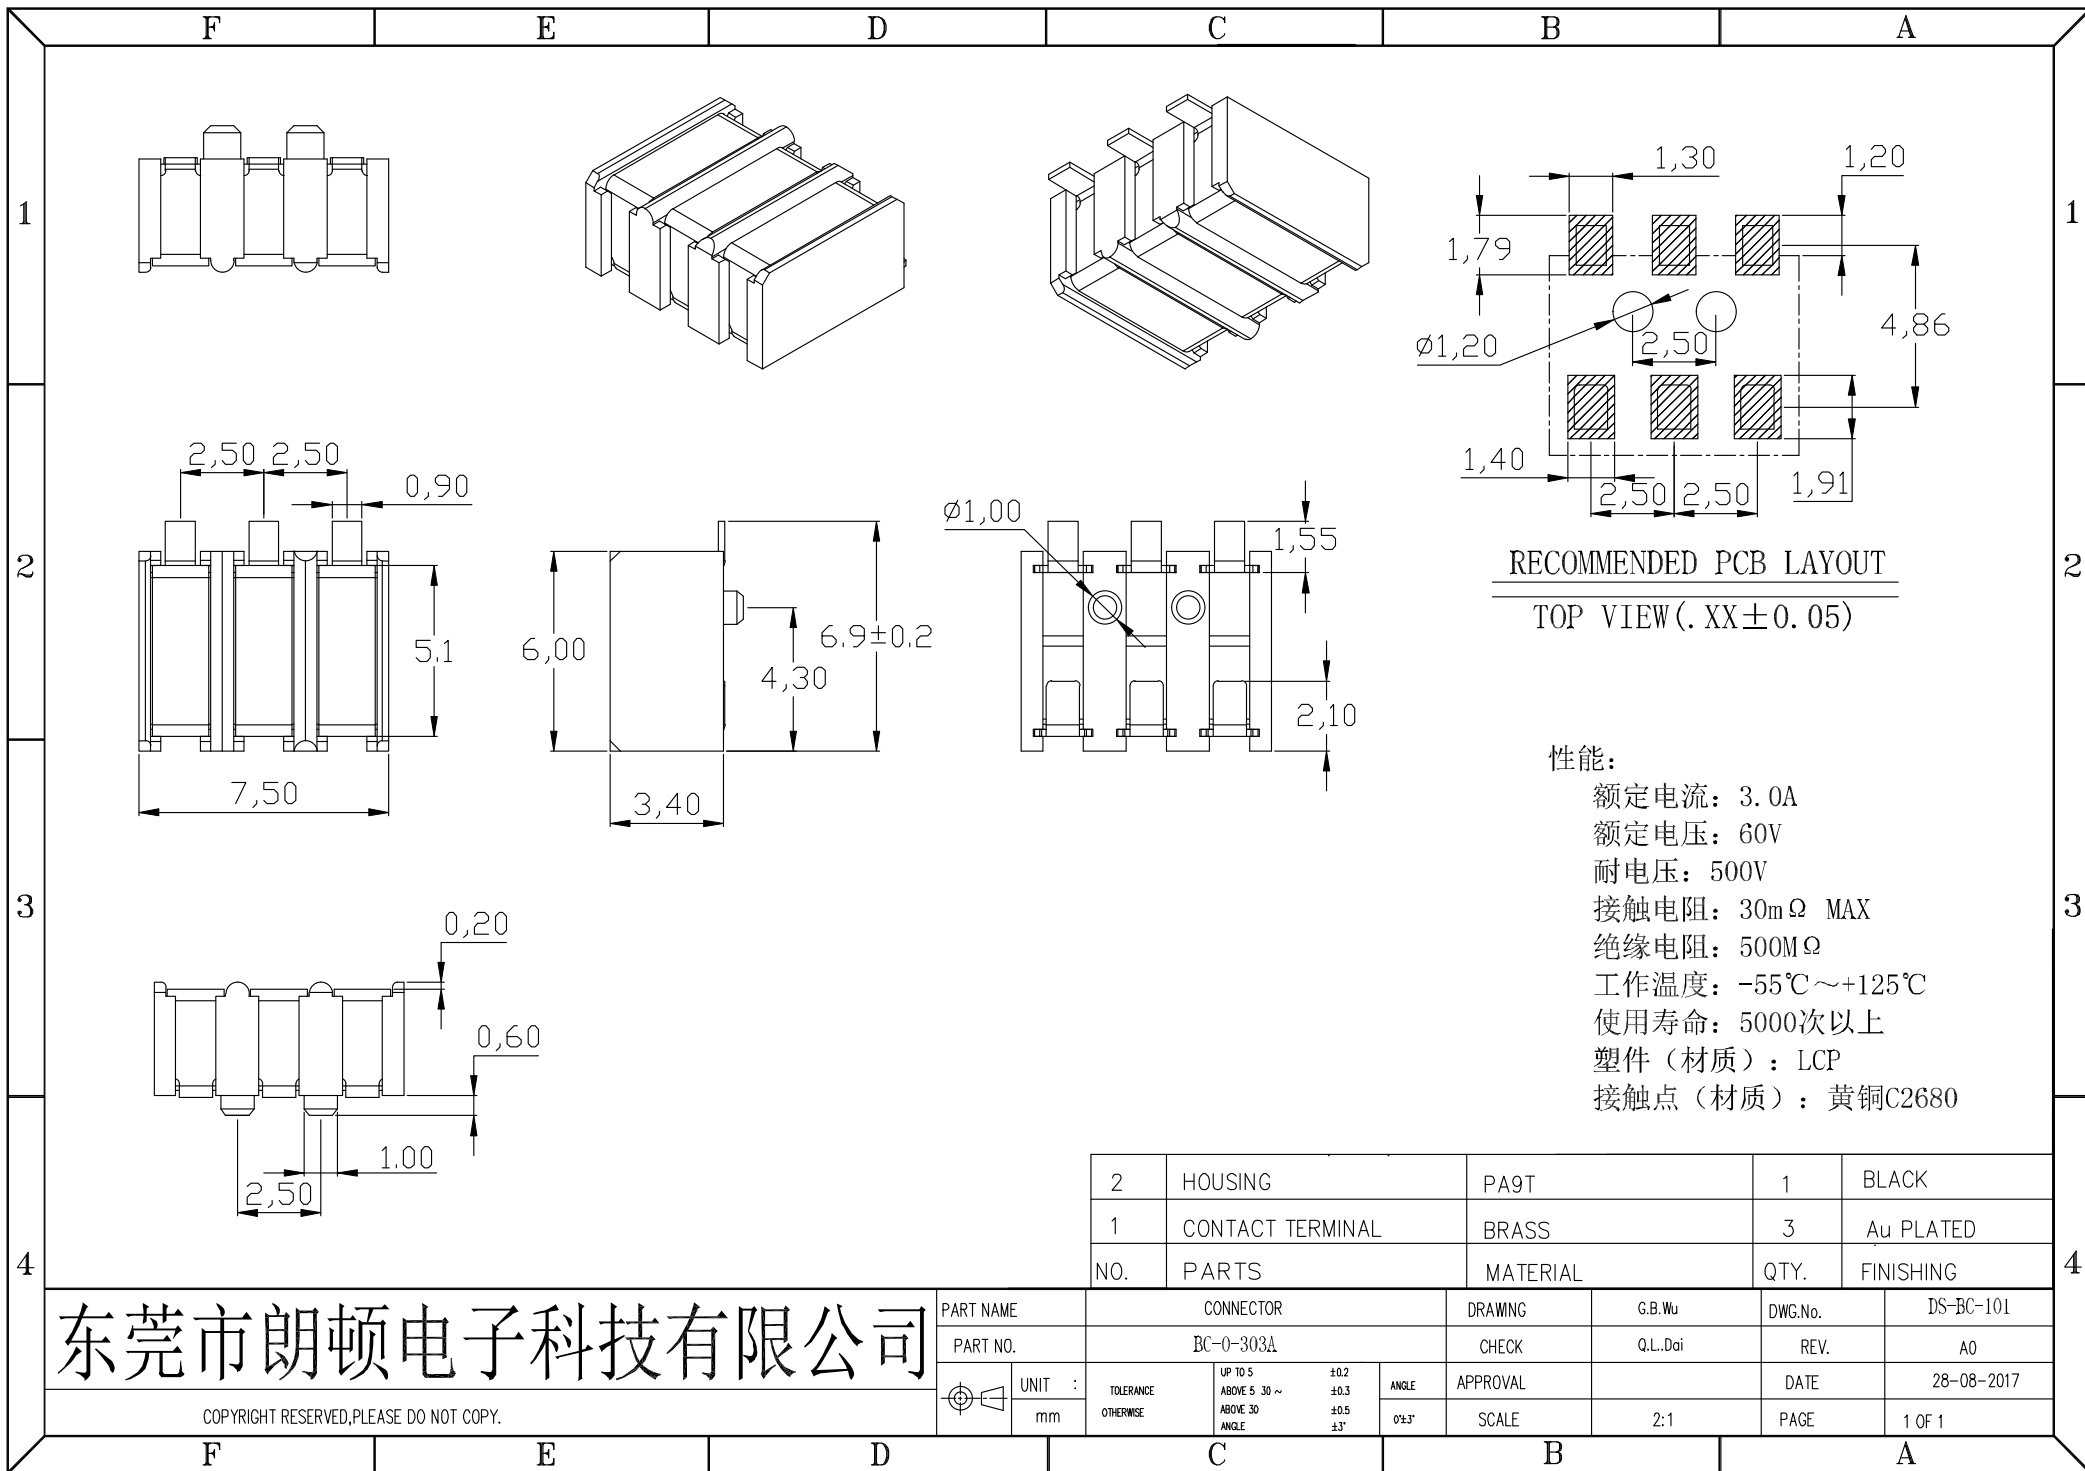

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)

性能:
额定电流: 3.0A
额定电压: 60V
耐压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -55℃~+125℃
使用寿命: 5000次以上
塑件(材质): LCP
接触点(材质): 黄铜C2680

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	BRASS	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	G.B.Wu	DWG.No.	DS-BC-101
PART NO.		BC-0-303A		CHECK	Q.L.Dai	REV.	A0
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ±0.2 ABOVE 5 30 ~ ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	ANGLE 0°~3°	APPROVAL	DATE	28-08-2017
					SCALE	PAGE	1 OF 1