


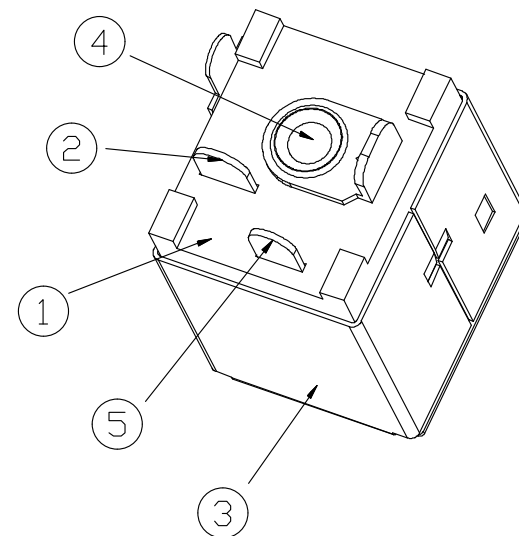

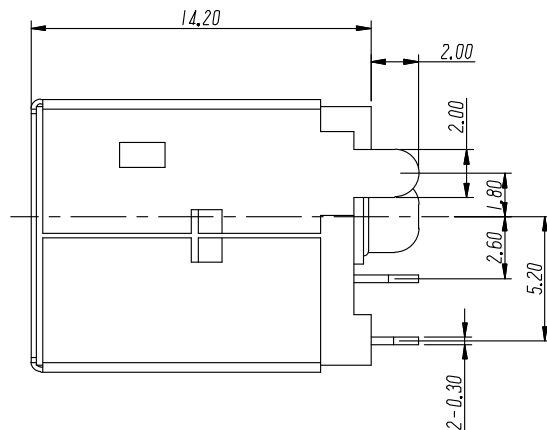
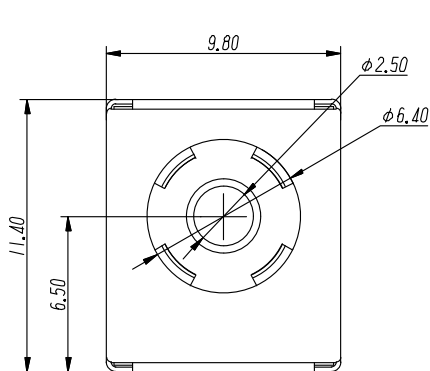


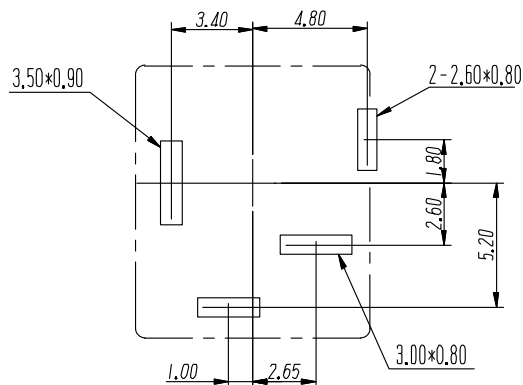

PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)

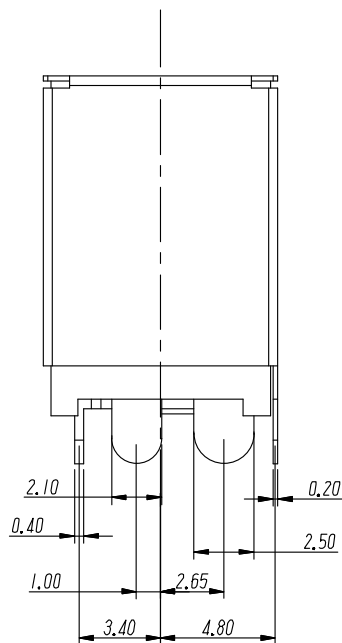

SCHEMATIC



技术特性:

使用条件: $-30 \sim 70^{\circ}$
额定负荷: DC 30V 10A
接触电阻: $\leq 0.02W$
绝缘电阻: $\geq 100mW$ DC250V
耐压: AC250V(50Hz)/min
插拔力: 3~15N
寿命: 5000次

6	平片	1	H62黄铜带(Y) $\delta=0.40mm$	D. Cu/Sn
5	簧片	1	磷铜0.65 $\delta=0.30mm$	D. Cu/Sn
4	插针PIN	1	H59黄铜(Y)	D. Cu/Sn
3	外壳	1	H62黄铜带 $\delta=0.2mm$	D. Cu/Sn
2	弹片	1	磷铜0.65 $\delta=0.30mm$	D. Sn/Sb
1	底座	1	PA9T	黑
序号	名称	数量	材料	备

GENERAL TOLERANCES			
0.X	± 0.30	X. $^{\circ}$	$\pm 3^{\circ}$
0.XX	± 0.20		
0.XXX	± 0.10	X.X $^{\circ}$	$\pm 1^{\circ}$
UNIT	SIZE	SCALE	
MM	A4	1:1	

DRAWN

DESIGN

CHECKED

APPROVED

TITLE: 电源插座

PART NO. DC-012G

PRODUCT NO.

DRAWING NO.

UNIT: mm SCALE: 1:1 REV: 01-1 SHT: 1 OF 1

朗顿电子

ECN NO.	REV	DATE	DESCRIPTION	MDF'D	APP'D
	01	2022.04.26	NEW DRAWING RELEASE		