


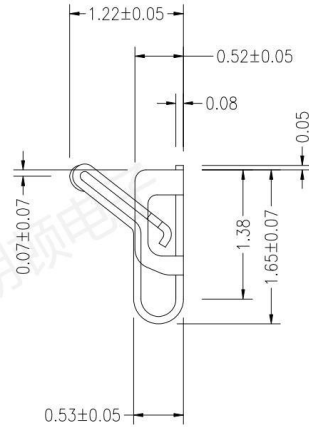


两侧挂钩须
超出挡板



RECOMMENDED PCB LAYOUT
TOLERANCE $\pm 0.05\text{MM}$



NOTES:

- 1: 材质 SUS304, THK 0.08
- 2: 表面处理 整体镀镍 50", 触点与焊盘位置镀金1u"
- 3, 性能:
接触电阻: 50mΩ MAX.
使用温度: $-20^{\circ}\text{C} \sim +65^{\circ}\text{C}$.
工作高度位置触点压力 0.5N
- 4, 包装.: 卷带包装
- 5, 带 * 尺寸为 IPQC 检查尺寸

朗顿电子

GENERAL TOLERANCE	
XX. ± 0.50	
X. ± 0.35	X.° $\pm 2.0^{\circ}$
.X ± 0.25	.X° $\pm 1.0^{\circ}$
.XX ± 0.10	.XX° $\pm 0.5^{\circ}$

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN

Chen

DATE

2024. 7. 18

CHECK

DATE

APPROVE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)

AS-058

TITLE

(CUSTOMER DRAWING)
Connector, Smt,
L1.65*W1.1*H1.2mm

REV.

A

SHEET

1/1