
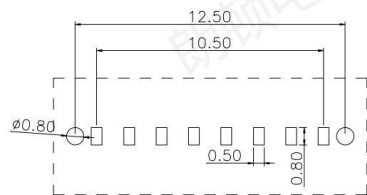

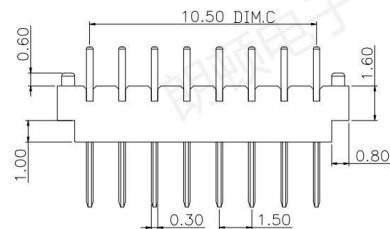


REV.	DESCRIPTION	DRAW.	DATE.

Material
 Insulator:Nylon 9T(UL94V-0)(C2680EH)
 Contact:phosphor Bronze
 Contact Plated:Gold over Nickel or Tin
 Specification
 Current rating:3A
 instant CURRENT:5A
 Contact Resistance:30MΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operating Temperature:-40°~105°

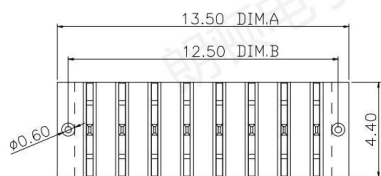

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

No. of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	3.50	1.50
03	6.00	5.00	3.00
04	7.50	6.50	4.50
05	9.00	8.00	6.00
06	10.50	9.50	7.50
07	12.00	11.00	9.00
08	13.50	12.50	10.50
09	15.00	14.00	12.00
10	16.50	15.50	13.50
11	18.00	17.00	15.00
12	19.50	18.50	16.50
13	21.00	20.00	18.00
14	22.50	21.50	19.50
15	24.00	23.00	21.00
16	25.50	24.50	22.50

东莞市朗顿电子科技有限公司

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	WJH	DATE	2024.09.06	TITLE:
	APPROVED		DATE		公座LD-A24M-A-R1系列
	PART NO	1.5间距180度公座系列		REV: 01	SCALE: 1:1 UNIT: mm
	DRAWING NO	1.5间距180度公座系列		SIZE: A4	SHEET: 1/1