
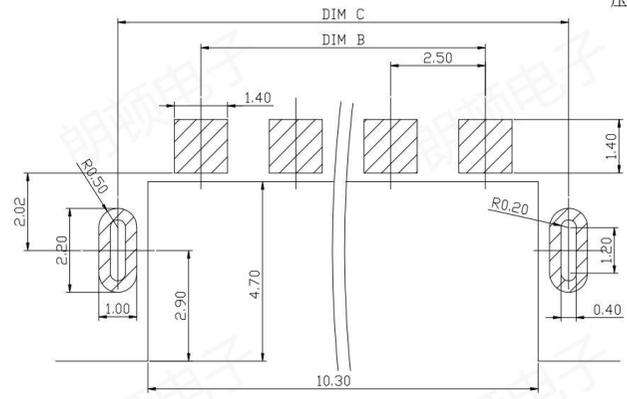
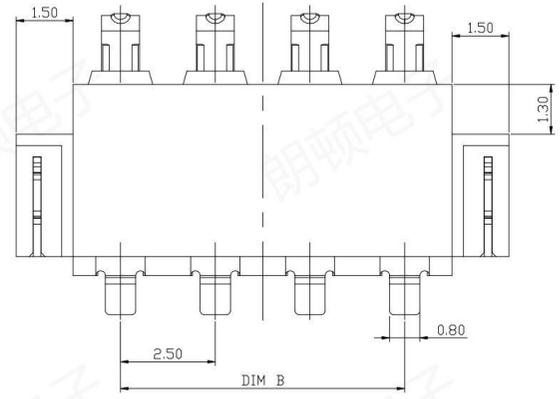
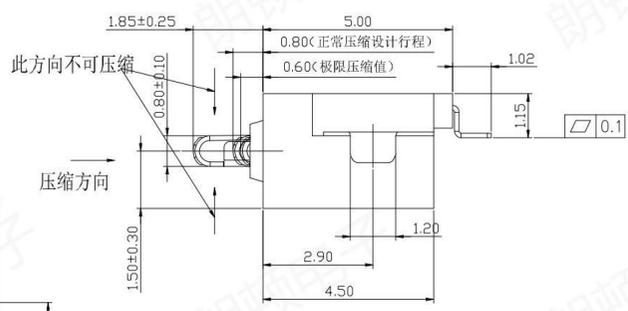


性能:
 额定电流: 2.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30mΩ 以内
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 使用寿命: 3000次以上
 塑件(材质): LCP(黑色) UL94-V0
 接触点(材质): 锡磷青铜, 触点镀金3U",
 焊脚镀雾锡80U"以上, 镍底30U"以上
 固定片(材质): 黄铜C2680,
 镀全雾锡80U"以上, 镍底30U"以上
 环保要求: 符合ROHS限值。

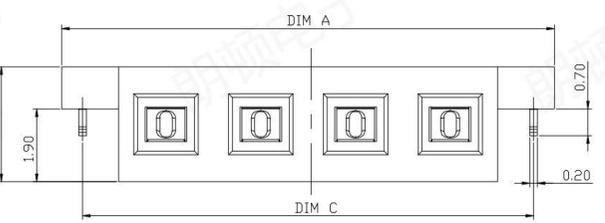

RECOMMENDED PCB LAYOUT
 TOP VIEW(.XX±0.05)

PART NO.	DIM A	DIM B	DIM C
BC-4-201-C01	8.00	2.50	6.90
BC-4-302-C01	10.50	5.00	9.40
BC-4-402-C01	13.00	7.50	11.90
BC-4-501-C01	15.50	10.00	14.40
BC-4-601-C01	18.00	12.50	16.90

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	PHOSPHORUS COPPER	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	G.B.Wu	DWG.No.	DS-BC-264
PART NO.		BC-4-201 302 402 501 601-C01		CHECK	Q.L..Dai	REV.	A0
UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL		DATE	27-09-2025
	OTHERWISE	ABOVE 5 TO ABOVE 30	±0.3				
mm		ABOVE 30	±0.5	SCALE	2:1	PAGE	1 OF 1
		ANGLE	±3'				